


E: 75150.3960(m)

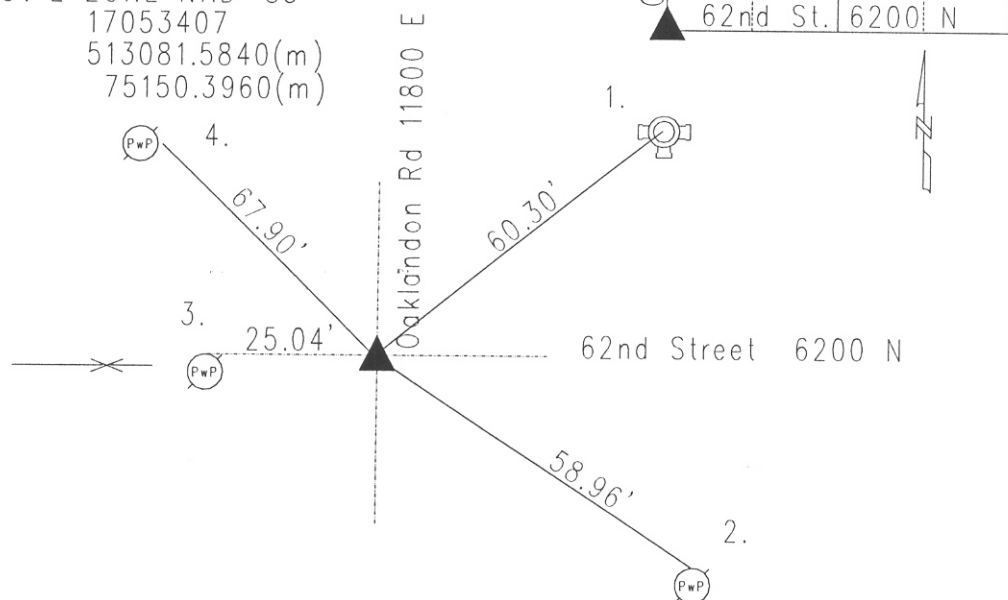

Original post set 1821 by Laughlin with witness: 18" beech N 65 W 24 links; 12" beech S 70 W 26 links. Legal 2-1849 by Hosbrook per Lawrence Township Legal Survey Book pg. 16 & 41 called corner label "A" one witness standing. Distances given to corners to the E. Legal 1877 or 1880 per Fatout per Lawrence Township Legal Survey Book pg. 40 gives distances to corners N & W but does not identify the corner itself. 12/1886 Smith called same. 4-24-61 Monroe indicated steel pin over stone 6" down. 7-21-71 McLand called. same. 5-5-75 Fortner & 8-9-79 Bruer called same. Excavated 8-2-92 by Cleveland. 2'x2' hole dug 3' deep. PK nail fd at surface 0.1'N and 0.15'W of high pt of stone 1' dn. 3' metal pin fd bent over stone. Pin at surface was 0.2'W and 0.1' N of stone. #5 steel rebar 1' fd 0.15' dn and 0.05' N & 0.15'W of high pt. Stone was 1 1/2'x8" and removed. Harrison set. Re-tied 6-25-93. Re-tied 5-21-99. Re-tied 8-19-04 by Wilcoxon.

17053407

[illegible]